



Bravo 800

Electrical submersible slurry pump

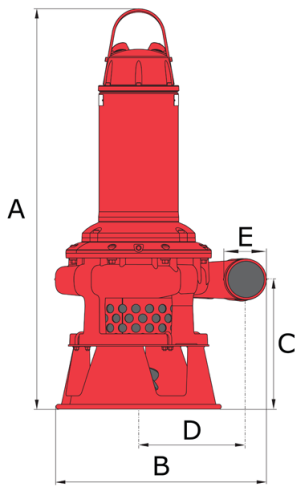

60 Hz	Bravo 800
Discharge connection F	6"
Rated power P_2	52 kW / 70 hp
Max. power consumption P_1	56 kW
Shaft speed	1775
Rated current at 460V	80 A
Rated current at 575V	63 A
Solids passage with / without agitator	36 mm
Dimensions A / B / C / D	1652 / 875 / 535 / 445 mm
Dimensions A / B / C / D	65 / 34½ / 21 / 17½ "
Weight	613 kg / 1351 lbs
Other voltages on request	

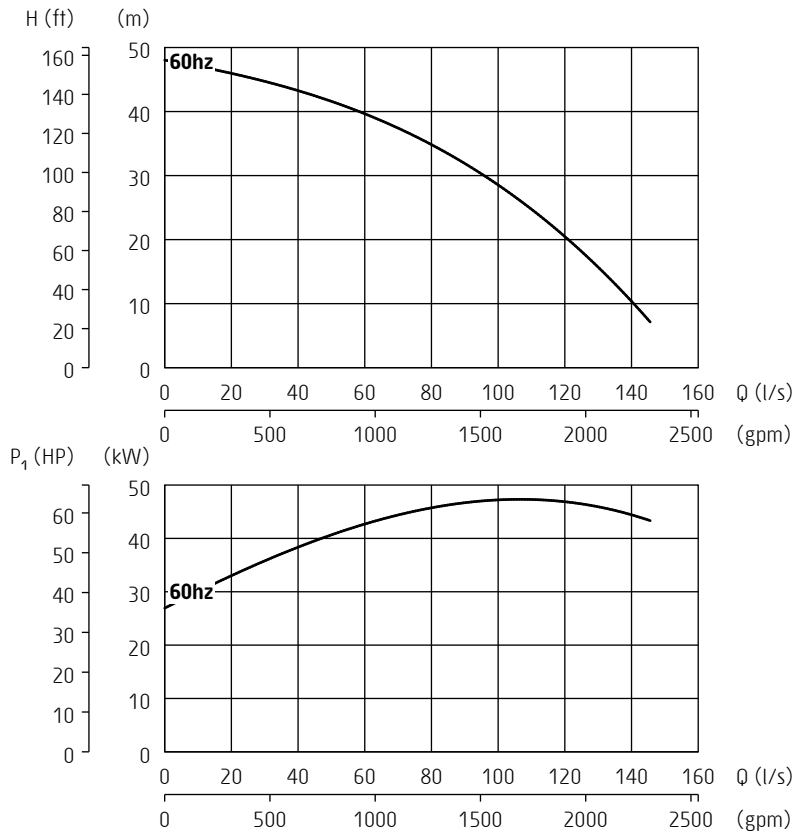

ISO 9906/A

General description

Pump with closed impeller and agitator for reliable pumping of highly abrasive slurry in high concentrations

Classification

Electrical submersible slurry pump
Protection class: IP 68

Electrical motor

Squirrel cage induction motor
Insulation class: H (IEC 85), DOL or star/delta

Motor protection

Thermoswitches in motor windings

This pump must be used with external motor protection in accordance with technical data

Cable - SubCab 20 m (66 ft)

400-500V DOL: 4x16mm² + 2x1.5mm²
400-500V Y/D: 2x4x10mm² + 2x1.5mm²

Shaft seals

Cartridge seal: pre-assembled double mechanical seal running in an oil compartment

Material lower seal: tungsten carbide - tungsten carbide

Material upper seal: tungsten carbide - tungsten carbide

Materials

Drive unit: *Cast iron*

Pump housing: *Hard-Iron™*

Impeller: *Hard-Iron™*

Lifting handle: *Stainless steel*

Shaft: *Stainless steel*

Agitator: *Hard-Iron™*

Studs, screws and nuts: *Stainless steel*

O-rings: *Nitrile rubber*

Limitations

Max. submersion depth: 20 m (66 ft)

Max. liquid temperature: 40 °C (104 °F)

Allowed pH range: 5.5 - 14

Specifications can be changed without notice