

Seal Conversions

Mechanical Seal Conversions for the Weir Warman® AH
Range of Heavy Duty Slurry Pumps



- Bespoke designs
- Modular construction
- Ease of installation
- Ease of selection
- Self-aligning seal faces
- Cartridge design
- Pre-set unit for reliable installation

Proudly Distributed By:

Mechanical seal conversions for heavy duty slurry pumps

Adaptive Hardware

- Australian backplates are sourced from Weir Australia, if sourced from AESSEAL® this will be a special item
- UK/EU/ZA backplates are sourced from Weir UK/Europe/South Africa, AESSEAL® adaptive hardware can be found on the seal drawings notes section and is not inventoried, contact the AESSEAL® Technical department for price and lead time



316L SS Adaptive Hardware
(only for the UK/EU/SA variant)




Super duplex Adaptive Hardware
(only for the UK/EU/SA variant)




CDPH™ — Double Seal for Heavy Duty Slurries

- Australian or UK/EU/ZA options available
- Double mechanical seal is designed to meet the arduous requirements of heavy duty slurry applications
- Stationary faces are oversized to allow for more radial movement
- Large ports and increased radial clearances enable the seal to maintain a stable fluid film for extended seal life
- Exotic metal parts are available to resist corrosion and erosion
- 316L SS, Super Duplex or Alloy 276 are configured standard and are on inventory

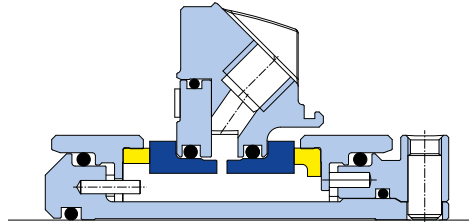

CDPH™ — UK/EU/ZA backplate

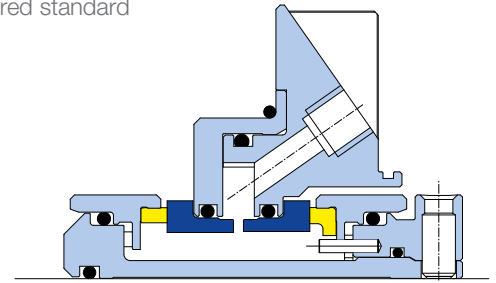


CDPH™ — Australian backplate




FGDSS-N™ / FGDSS-NL™ — Single Slurry Seal


- Australian or UK/EU/ZA options available
- Single seal suitable for all FGD, Mining and Mineral Ore production applications
- Long lasting, abrasion resistant materials of construction
- Robust construction designed for ease of installation
- Rapid delivery on engineered and customized designs
- 316L SS, Super Duplex or Alloy 276 are configured standard and are on inventory

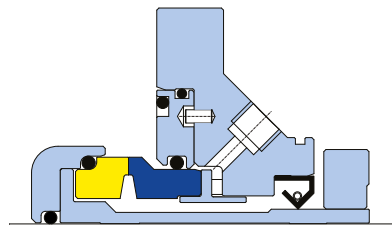


FGDSS-NL™ — UK/EU/ZA backplate

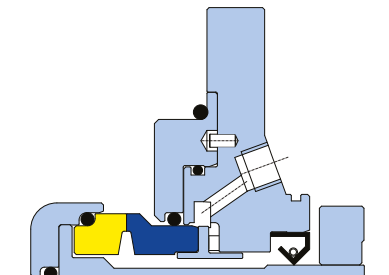

FGDSS-NL™ — Australian backplate

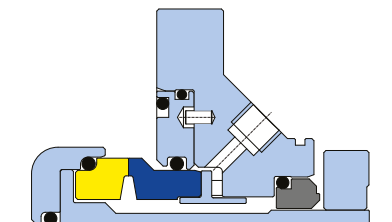

FGDSS-N™ — UK/EU/ZA backplate

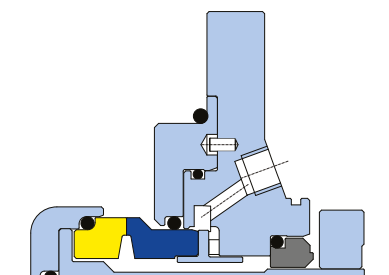

FGDSS-N™ — Australian backplate

CDPH™ UK/EU/ZA

Face Combination	Size and Pump Ref.	O'ring	Metallurgy
TC/TC/TC/CB TC/TC/TC/TC SiC/SiC/SiC/CB SiC/SiC/SiC/SiC	50mm (1.5/1 B-AH, 2/1.5 B-AH) 60mm (3/2 C-AH, 4/3 C-AH) 85mm (4/3 D-AH, 6/4 D-AH) 100mm (6/4 E-AH, 8/6 E-AH, 10/8 E-M, 12/10 E-M) 130mm (8/6 F-AH, 10/8 F-M, 12/10 F-M) 180mm (10/8 G-AH, 12/10 G-AH, 14/12 G-AH) *5.000" (8/6 F-AH, 10/8 F-M, 12/10 F-M) *7.000" (10/8 G-AH, 12/10 G-AH, 14/12 G-AH) *South Africa Only	FKM EPR TFE/P FFKM A AES-Elast FFKM A / FKM	316L SS Super Duplex Alloy 276

CDPH™ Australia

Face Combination	Size and Pump Ref.	O'ring	Metallurgy
TC/TC/TC/CB TC/TC/TC/TC SiC/SiC/SiC/CB SiC/SiC/SiC/SiC TC/SiC/TC/SiC	50mm (1.5/1 B&N-AH, 2/1.5 B&N-AH) 60mm (3/2 C-AH, 3/2 P-AH, 4/3 C-AH, 4/3 P-AH) 85mm (4/3 D-AH, 4/3 Q-AH, 6/4 D-AH, 6/4 Q-AH) 100mm (6/4 E-AH, 8/4 E-AH, 8/4 R-AH, 10/8 E-M, 10/8 R-M, 12/10 E-M, 12/10 R-M) 130mm (8/6 F-AH, 10/8 F-M, 12/10 F-M)	FKM EPR TFE/P FFKM A AES-Elast FFKM A / FKM	316L SS Super Duplex Alloy 276

FGDSS-N™ & FGDSS-NL™ UK/EU/ZA


Face Combination	Size and Pump Ref.	O'ring	Metallurgy
SiC/SiC	50mm (1.5/1 B-AH, 2/1.5 B-AH) 60mm (3/2 C-AH, 4/3 C-AH) 85mm (4/3 D-AH, 6/4 D-AH) 100mm (6/4 E-AH, 8/6 E-AH, 10/8 E-M, 12/10 E-M) **130mm (8/6 F-AH, 10/8 F-M, 12/10 F-M) **180mm (10/8 G-AH, 12/10 G-AH, 14/12 G-AH) **Australia Only	FKM TFE/P EPR AES-Elast	316L SS Super Duplex Alloy 276

FGDSS-N™ & FGDSS-NL™ Australia

Face Combination	Size and Pump Ref.	O'ring	Metallurgy
SiC/SiC	50mm (1.5/1 B&N-AH, 2/1.5 B&N-AH) 60mm (3/2 C-AH, 3/2 P-AH, 4/3 C-AH, 4/3 P-AH) 85mm (4/3 D-AH, 4/3 Q-AH, 6/4 D-AH, 6/4 Q-AH) 100mm (6/4 E-AH, 8/4 E-AH, 8/4 R-AH, 10/8 E-M, 10/8 R-M, 12/10 E-M, 12/10 R-M) 130mm (8/6 F-AH, 10/8 F-M, 12/10 F-M) 180mm (10/8 G-AH, 12/10 G-AH, 14/12 G-AH)	FKM TFE/P EPR AES-Elast	316L SS Super Duplex Alloy 276

Bearing Protection suitable for use with Weir Warman® AH Pumps

- Full range of end covers and stub shafts available
- Manufactured components or drawings can be supplied
- Drawings can be used for modification of OEM equipment
- Proven to increase equipment reliability

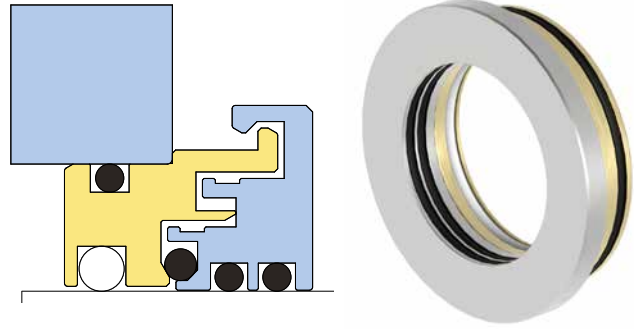

LabTecta®AH

- Advanced labyrinth seal design
- PTFE grease inhibitor band for superior egress protection
- Robust heavy duty design
- Shut-off valve to prevent contamination from bearing chamber breathing
- Proven to increase equipment reliability
- Full range of end covers and stub shafts also available

For further information view the LabTecta®AH product brochure Bearing protection suitable for use with Weir Warman®AH pumps



Complete environmental control management systems available



AESSEAL® high performance barrier fluid systems help to increase plant uptime even further by enhancing the environment in which mechanical seals operate. Many of these barrier fluid systems are patented, which means that the technology is exclusive to AESSEAL®.

We recommend the SW Range for the Weir Warman solutions. For more information please visit www.aesseal.com/systems



This brochure is fully recyclable. When laminated, a sustainable, biodegradable and recyclable lamination is used.

For further information and safe operating limits contact our technical specialists at the locations below.



UK Sales & Technical advice:

AESSEAL plc
Mill Close
Bradmarsh Business Park
Rotherham,
S60 1BZ, UK
Tel: +44 (0) 1709 369966
E-mail: enquiries@aes seal.info
www.aesseal.com

AESSEAL plc is certified to:

ISO 9001, ISO 14001, ISO/IEC 20000, ISO/IEC 27001,
ISO/TS 29001, ISO 37001, ISO 45001 & ISO 50001



Net Zero champions globally



Use double mechanical seals with hazardous products.

Always take safety precautions:

- Guard your equipment
- Wear protective clothing



USA Sales & Technical advice:

AESSEAL Inc.
355 Dunavant Drive
Rockford,
TN. 37853,
USA

Tel: +1 865 531 0192
E-mail: usa@aes seal.com
www.aesseal.com

Important: Since the conditions and methods of use of this product are beyond our control, AESSEAL plc expressly disclaims any and all liability resulting or arising from any use of this product or reliance on any information contained in this document - AESSEAL plc standard conditions of sale apply. All sizes are subject to manufacturing tolerances. We reserve the right to modify specifications at any time. AESSEAL® is a Registered Trademark of AES Engineering Ltd, AESSEAL plc recognizes all trademarks and trademark names as the property of their owners.

Warman® is a registered trademark of Weir Minerals Australia Ltd and Weir Group African IP Ltd

LIT-UK/US-L-WARMAN-AH-07 Copyright © 2023 AESSEAL plc 06/2023